

## ALIGNER FEEDER FLOWPACK – AFO1

### FOR THE AUTOMATIC FEEDING AND WRAPPING OF SMALL AND MEDIUM SIZED BAR-TYPE PRODUCTS INTO A PILLOW PACK STYLE

The Aligner feeder flow-pack machine will automatically arrange products into a single file before feeding them into the wrapping section. It has a wrapping speed of 300-500 wraps per minute and will adjust its speed to coincide with the production machines feeding it.


The in-feed section uses a series of conveyors to automatically align products into single file before feeding them into the wrapper.

The flow-pack is fully automatic with print registration and a date printer, as well as an auto-reject device for misplaced chocolates/candies.

The machine can also be supplied in different configurations of cutting jaws for different sized products.

### FEATURES

- Optional Vibratory feeding system
- Multi-brush plate feed system
- Print registration unit for running printed films
- Wrapping counter
- Pack length change by keypad
- Touch screen interface
- Double Roll Film System for quick changeovers
- Pack Capabilities:
  - 2 cutter jaw gives a bag size of 90–180mm
  - 3 cutter jaw gives a bag size of 70–120mm
  - 4 cutter jaw gives a bag size of 50–80mm

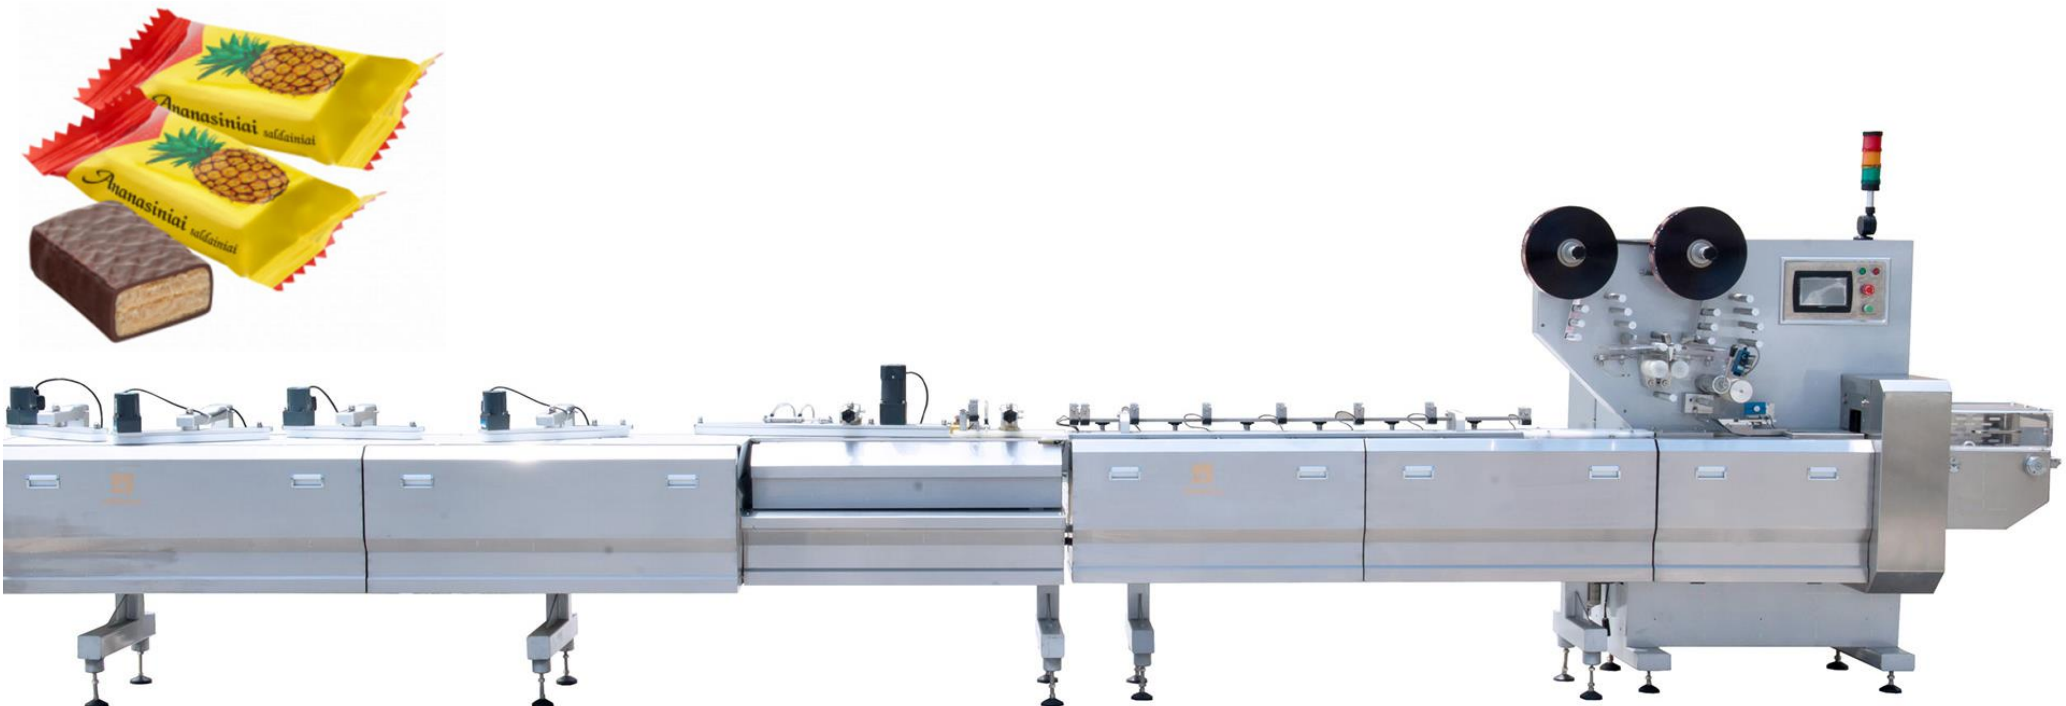

## ALIGNER FEEDER FLOWPACK – AF01

### SPECIFICATIONS

**Dimensions:**

(L)6700m x (W)1050mm x (H)1400mm

**Material**

Stainless Steel

**Speed**

300 - 500Pcs per minute

**Weight**

2000Kg

**Power**

5Kw

Max roll diameter: 330mm

